




## 40' X 9' 6" Refrigerated ISO Cargo Container

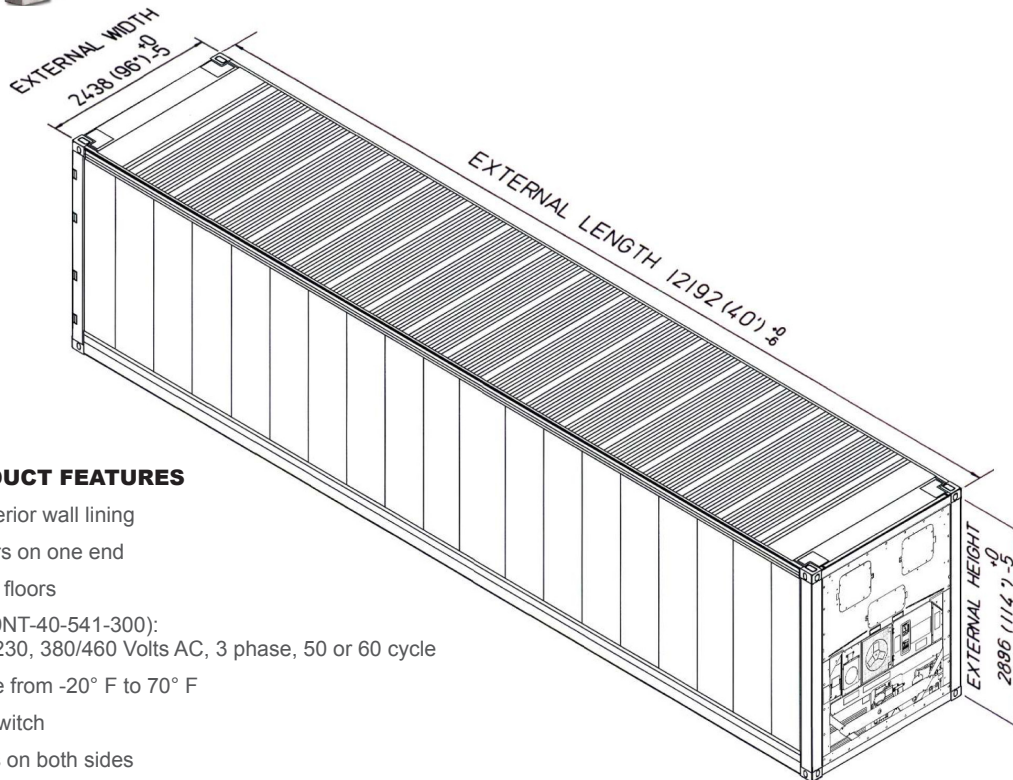

### STANDARD PRODUCT FEATURES

- Stainless Steel interior wall lining
- Double swing doors on one end
- Aluminum T-grade floors
- Carrier (Model #69NT-40-541-300):  
Dual Voltage 208/230, 380/460 Volts AC, 3 phase, 50 or 60 cycle
- Temperature range from -20° F to 70° F
- Interior light with switch
- Full length shelves on both sides

### ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD FOR NINE (9) HIGH STACKING

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
<b>Ft in</b>	40' 0"	38' 0 3/4"	9' 6"	8' 5 3/4"	8' 0"	7' 6 1/8"	8' 5 1/8"	7' 6 1/8"
<b>Metric</b>	12,192	11,602	2,896	2,585	2,438	2,290	2,569	2,290

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
<b>Lbs</b>	10,030	57,170	67,200	2,382 Cu. Ft.
<b>Kgs</b>	4,550	25,930	30,480	67.42 Cu. M.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

**SB561.9.SW.FLS**  
40' X 9' 6" Refrigerated ISO Cargo Container

000000-R00



**GSA Advantage!**  
CONTRACT # GS-02F-0024P